


## ■ Features

- 1. Low operating current
- 2. Standard optical power output : 5mW (CW)
- 3. P-side down mounted package

## ■ Applications

- 1. Laser projecting/pointer/leveler
- 2. Bar code scanner
- 3. Phototherapy
- 4. Rangefinder
- 5. Particle counter

## ■ External dimensions(Unit : mm)

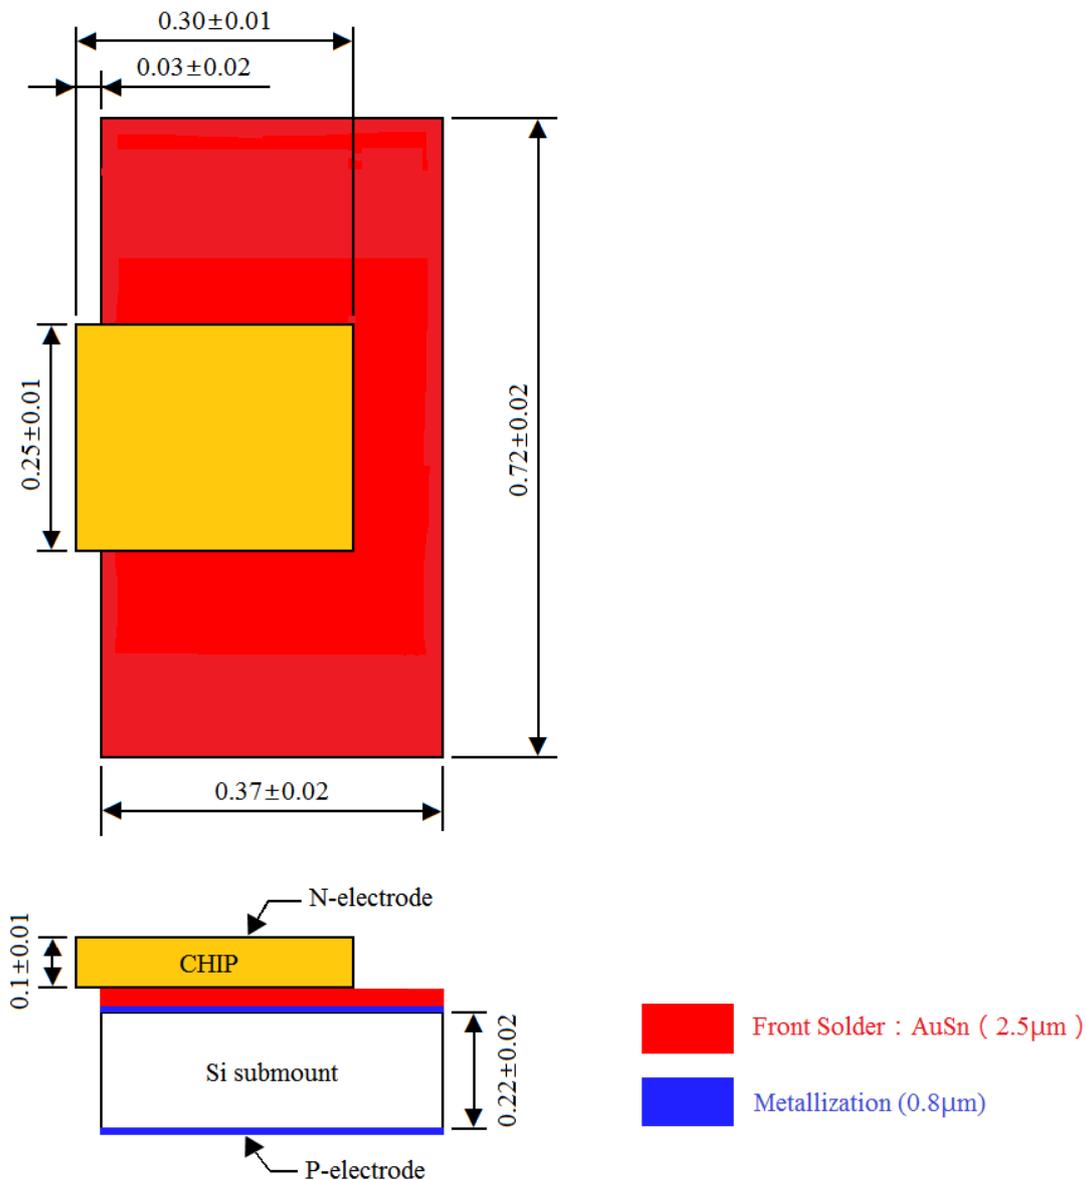

**UNION OPTRONICS CORP.**

No.156, Gaoshih Rd., Yangmei Dist., Taoyuan City 326, Taiwan  
TEL : +886-3-4852687 +886-3-2759468 FAX : +886-3-4754378  
E-mail : sales@uocnet.com Website : <http://www.uocnet.com>

## ■ Electrical and Optical Characteristics(Tc=25°C)

| Parameter                 | Symbol          | Condition                   | Min.                | Typ.       | Max.       | Unit      |      |
|---------------------------|-----------------|-----------------------------|---------------------|------------|------------|-----------|------|
| Threshold Current         | I <sub>th</sub> | -                           | -                   | <b>10</b>  | <b>13</b>  | mA        |      |
| Operating Current         | I <sub>op</sub> | P <sub>o</sub> =5mW         | -                   | <b>16</b>  | <b>20</b>  | mA        |      |
| Operating Voltage         | V <sub>op</sub> | P <sub>o</sub> =5mW         | -                   | <b>2.1</b> | <b>2.3</b> | V         |      |
| Slope Efficiency          | $\eta$          | P <sub>o</sub> =1.25-3.75mW | <b>0.7</b>          | <b>0.9</b> | -          | mW/mA     |      |
| Beam Divergence<br>(FWHM) | Parallel        | $\theta_{//}$               | P <sub>o</sub> =5mW | <b>5</b>   | <b>8</b>   | <b>12</b> | deg. |
|                           | Perpendicular   | $\theta_{\perp}$            | P <sub>o</sub> =5mW | <b>30</b>  | <b>36</b>  | <b>42</b> | deg. |
| Lasing Wavelength         | $\lambda$       | P <sub>o</sub> =5mW         | <b>640</b>          | <b>653</b> | <b>660</b> | nm        |      |

◎  $\theta_{//}$  and  $\theta_{\perp}$  are defined as the angle within which the intensity is 50% of the peak value.

## ■ Precautions

### QUALITY ASSURANCE

After any processing of laser chip or laser diode chip on submount (COS) by the customer, the performance, yield and reliability of the product, in which the chip or COS is applied, are subject to change due to customer's handling, assembly, testing, and processing. Because laser chip and COS are strongly affected by environmental conditions, physical stress, and chemical stresses imposed by customer that are not in Union Optronics Corp. (UOC) control and hence no guarantee on the characteristics and the reliability at all after the shipment. Also, UOC does not have any responsibility for field failures in a customer product. When attaching a heat sink to laser chip or COS, be careful not to apply excessive force to the device in the process.

### SAFETY PRECAUTIONS

Although Union Optronics Corp. (UOC) keeps improving quality and reliability of its laser chip and laser diode chip on submount (COS), semiconductor devices in general can malfunction or fail due to their intrinsic characteristics. Hence, it is required that the customer's products are designed with full regard to safety by incorporating the redundancy, fire prevention, error prevention so that any problems or error with UOC laser chip or COS does not cause any accidents resulting in injury, death, fire, property damage, economic damage, or environmental damage. In case customer wants to use UOC laser chip or COS in the systems requiring high safety, customer is requested to confirm safety of entire systems with customer's own testing.

### SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

The information provided by Union Optronics Corp. (UOC), including but not limited to technical specifications, recommendations, and application notes relating to laser chip or laser diode chip on submount (COS) is believed to be reliable and accurate and is subject to change without notice. UOC reserves the right to change its assembly, test, design, form, specification, control, or function without notice.

